HOTEL SUPPLIES

YirouFang Textile Manufacture Co.,Ltd.





Visit Factory

360° VR panoramas we provide

http://www.yrftextile.com

Email: info@yrftextile.com



I can't install it without a drill!

I don't want to drill holes on marble and tiles.



Do not need to drill



Do not need to punch



Locate and fix one side of roller blind, push the other side back

Get stuck in the window frame.

Screw up the rod, increase the supporting force on both sides, complete installation.





DRILLING FREE ROLLER BLIND

No special requirements for the wall.

It's also applicable to concrete wall and other rough surface.

Weakness of drilling free roller blind:

Only applicable to smooth surfaces such as tile and marble



Whitewashed wall

Rough tile

Marble

Wooden wall


Break the limit, the width can reach 2.3m. It's possible to make large size.







Break the limit, the width can reach 2.5m.

It's possible to make large size.

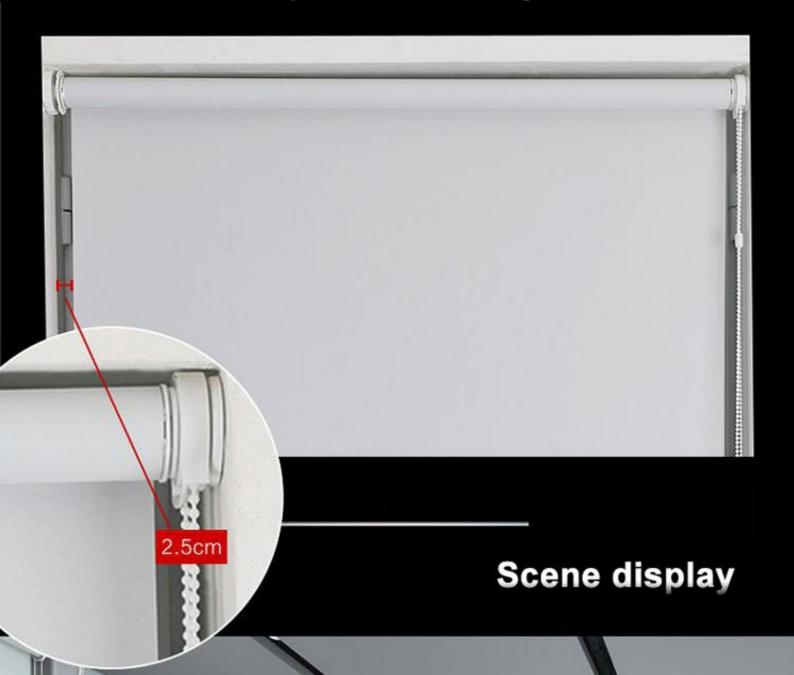

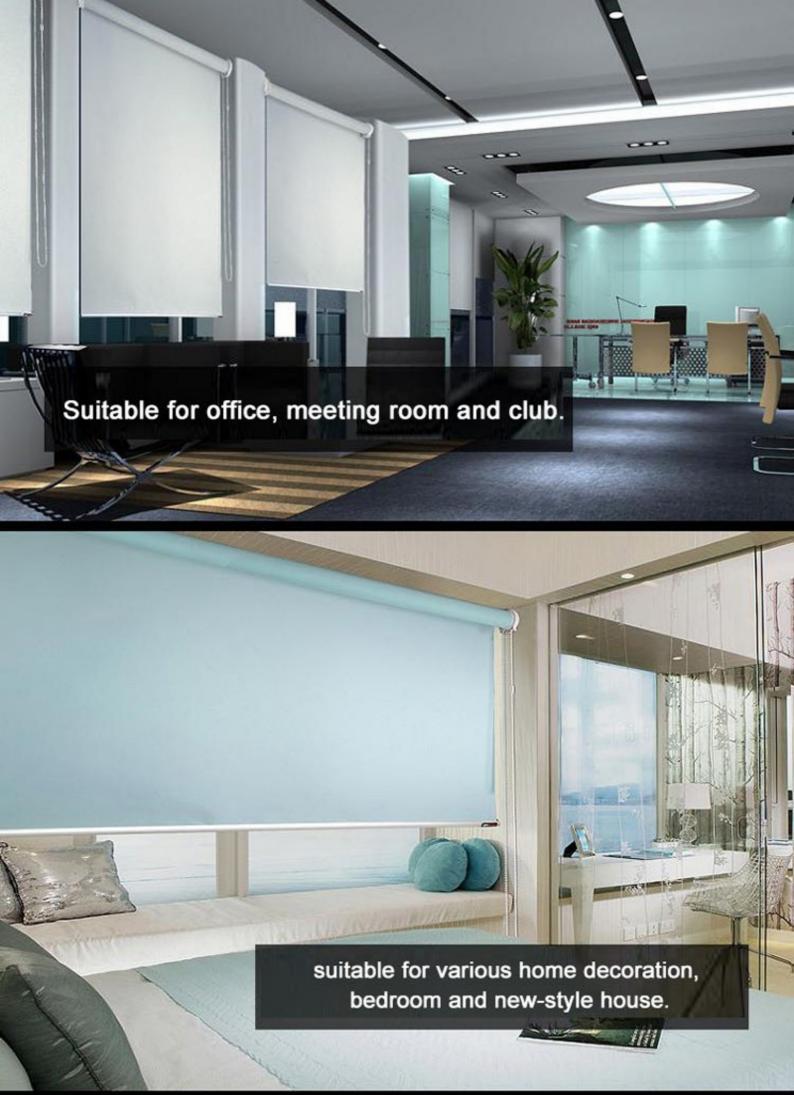

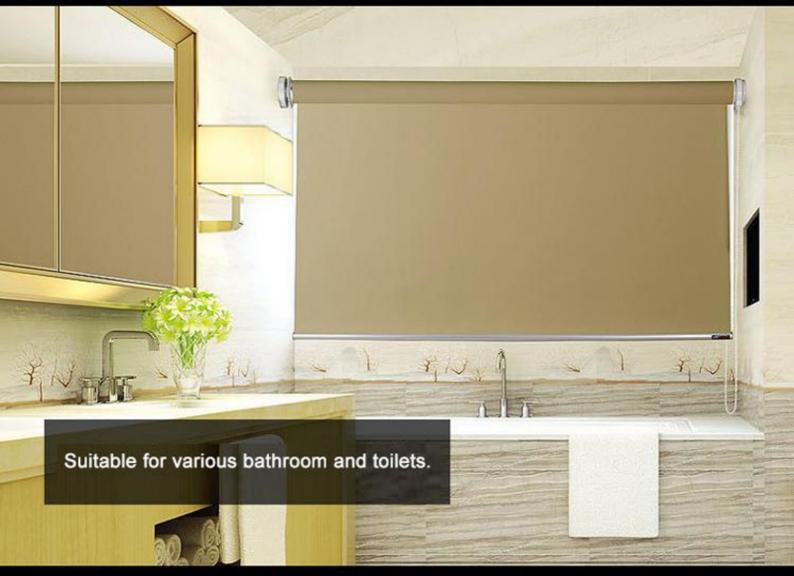





Side-push window (Exterior/interior mounting)



Outward-push window (Exterior/interior mounting)



Inward-push window (only Exterior mounting)





Drilling-free distensible roller blind can only be interiorly or side mounted.

Do not be exteriorly mounted





























